


AHEB Series IO Expansion Board

- Scalable
- Supervised Inputs
- 3rd Party Integration
- I/O Relay Available, 2/ 8.

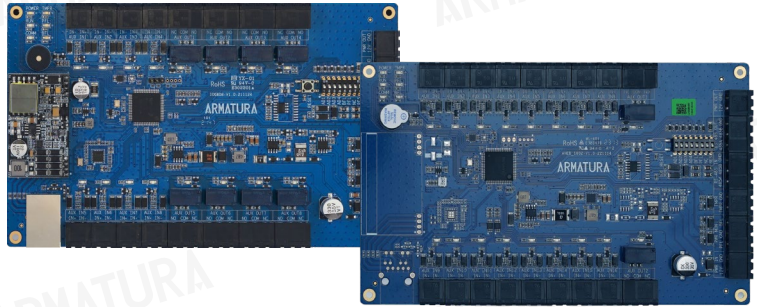

Key Features

Advanced Security

AHEB I/O expansion boards can communicate with AHSC1000 or AHDU series controllers through OSDP V2.2 over RS-485. The communication is secured with AES128/TLS 1.2 (with AES256) encryption. Communications between the Armatura One server and web client are protected by HTTPS/TLS1.2 (AES256) or above. Enhanced encryption levels are provided by an additional crypto chip (Certified EAL6+ standard), offering dedicated storage and cryptographic functionality for all Armatura controllers.

Innovative System Management Hierarchy

The AHEB series IO expansion board can be monitored and updated through encrypted RS-485 communication by the AHSC-1000 and AHDU controller series onboard webserver. It supports communication with the ArmaturaOne security system and will soon support Cielo365 as well, using the AHSC-1000 and AHDU controller series.

Scalability

The AHEB series supports up to 384 inputs and 385 outputs when used with a single AHDU controller. In a combination of AHSC-1000 and AHDU series controllers, it can ultimately handle up to 12,801 inputs or outputs. All communications are securely protected by AES128 encryption.

Supervised Inputs

The AHEB IO expansion board series is equipped with 4 state-supervised inputs, designed to mitigate short-circuit attacks effectively. These inputs can detect abnormal changes, even as low as 5% Ohms in the circuits, and efficiently filter out all potential attacks. Isolated microchips independently manage REX inputs and dedicated fire alarm inputs, ensuring their uninterrupted functionality even under extreme situations.

3rd Party Integration

The AHEB series supports various relay inputs and outputs, making it suitable for a wide range of security devices. The ArmaturaOne system offers a RESTful API for seamless integration with 3rd Party Software.


Universal Voltage

Supports 9 to 24Vdc inputs making it the ideal choice for universal deployment, eliminating the need for additional power adaptors.


Programmable Input States with Time Zone Management

The AHEB series offers supervised and programmable input states, including In-Active, Active, Short, and Open. Users can easily configure these input states and input time through the ArmaturaOne security platform, with compatibility for Cielo365 integration coming soon.

Dimensions of Expansion Board

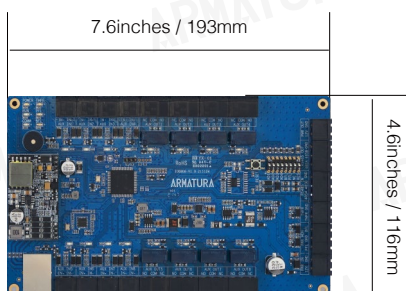

AHEB-0808

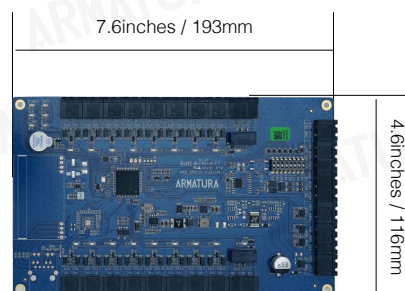

AHEB-1602

General Information		
	AHEB-0808	AHEB-1602
Primary Power	12 - 24 VDC \pm 20%, 550 mA maximum	
RS-485 Connectivity	Output: RS-485 standard / OSDP V2.2 (Dedicated for AHSC-1000/ AHDU series controller communication) Input: RS-485 Input standard / OSDP V2.2 (Dedicated for AHEB series IO expansion board communication)	
Number of Ports	1*RS-485 8*supervised input (AUX IN) 8*relay output (AUX OUT) 1* power Input (PWR IN) 1*power output (PWR OUT) 1*power detection (AC Fail) 1* backup battery detection (BAT Fail) 1*tamper input (TMPR)	1*RS-485 16*supervised input (AUX IN) 2*relay output (AUX OUT) 1* power Input (PWR IN) 1*power output (PWR OUT) 1*power detection (AC Fail) 1* backup battery detection (BAT Fail) 1*tamper input (TMPR)
Inputs	8 relays 4 state supervision, resistor values (5% tolerance), Normally open contact: use 1.2k, 2.2k. 4.7k or 10k Normally closed contact: use 1.2k, 2.2k. 4.7k or 10k	8 relays 4 state supervision, resistor values (5% tolerance), Normally open contact: use 1.2k, 2.2k. 4.7k or 10k Normally closed contact: use 1.2k, 2.2k. 4.7k or 10k
Outputs	8 relays, 8* Form-C with dry contacts	2 relays, 2* Form-C with dry contacts

AHSC/ AHDU Interface		
	AHEB-0808	AHEB-1602
RS-485 Protocol	12 - 24 VDC \pm 20%, 550 mA maximum	
OSDP Mode	9600-115200 bps, OSDP V2.2, asynchronous, half-duplex, 1 start bit, 8 data bits, and1 stop bit. Maximum cable length: 2,000 ft. (609.6m)	
Data Inputs	OSDP supported. Maximum cable length: 500 ft. (152m)	


Cable Requirement		
	AHEB-0808	AHEB-1602
Power & Relays	12 - 24 VDC \pm 20%, 550 mA maximum	
RS-485 Port	9600-115200 bps, asynchronous, half-duplex, 1 start bit, 8 data bits, and1 stop bit. One twisted pair with drain wire and shield, 120 ohm resistance, 22-18 AWG, Maximum cable length: 3937ft (1200m)	

Mechanical		
	AHEB-0808	AHEB-1602
Dimensions	7.6" W x 4.6" L x 0.7" H (193 x 116 x 17.5mm)	
Weight	5.8oz (165.3g)	
Mounting	Wall Mount	

Environmental		
	AHEB-0808	AHEB-1602
Temperature	-22°F ~ 158°F (-30°C~70°C), Operating & Storage	
Humidity	0-95%RHNC	
Certification(s)	CE, FCC, RoHS, UL294	
Security Rating	Data Storage Encrypted with Certified EAL6+ Crypto Chipset	

Software Interface		
	AHEB-0808	AHEB-1602
Supported Software	Armatura One Security System, Cielo365 (coming soon)	

Armatura System Diagram

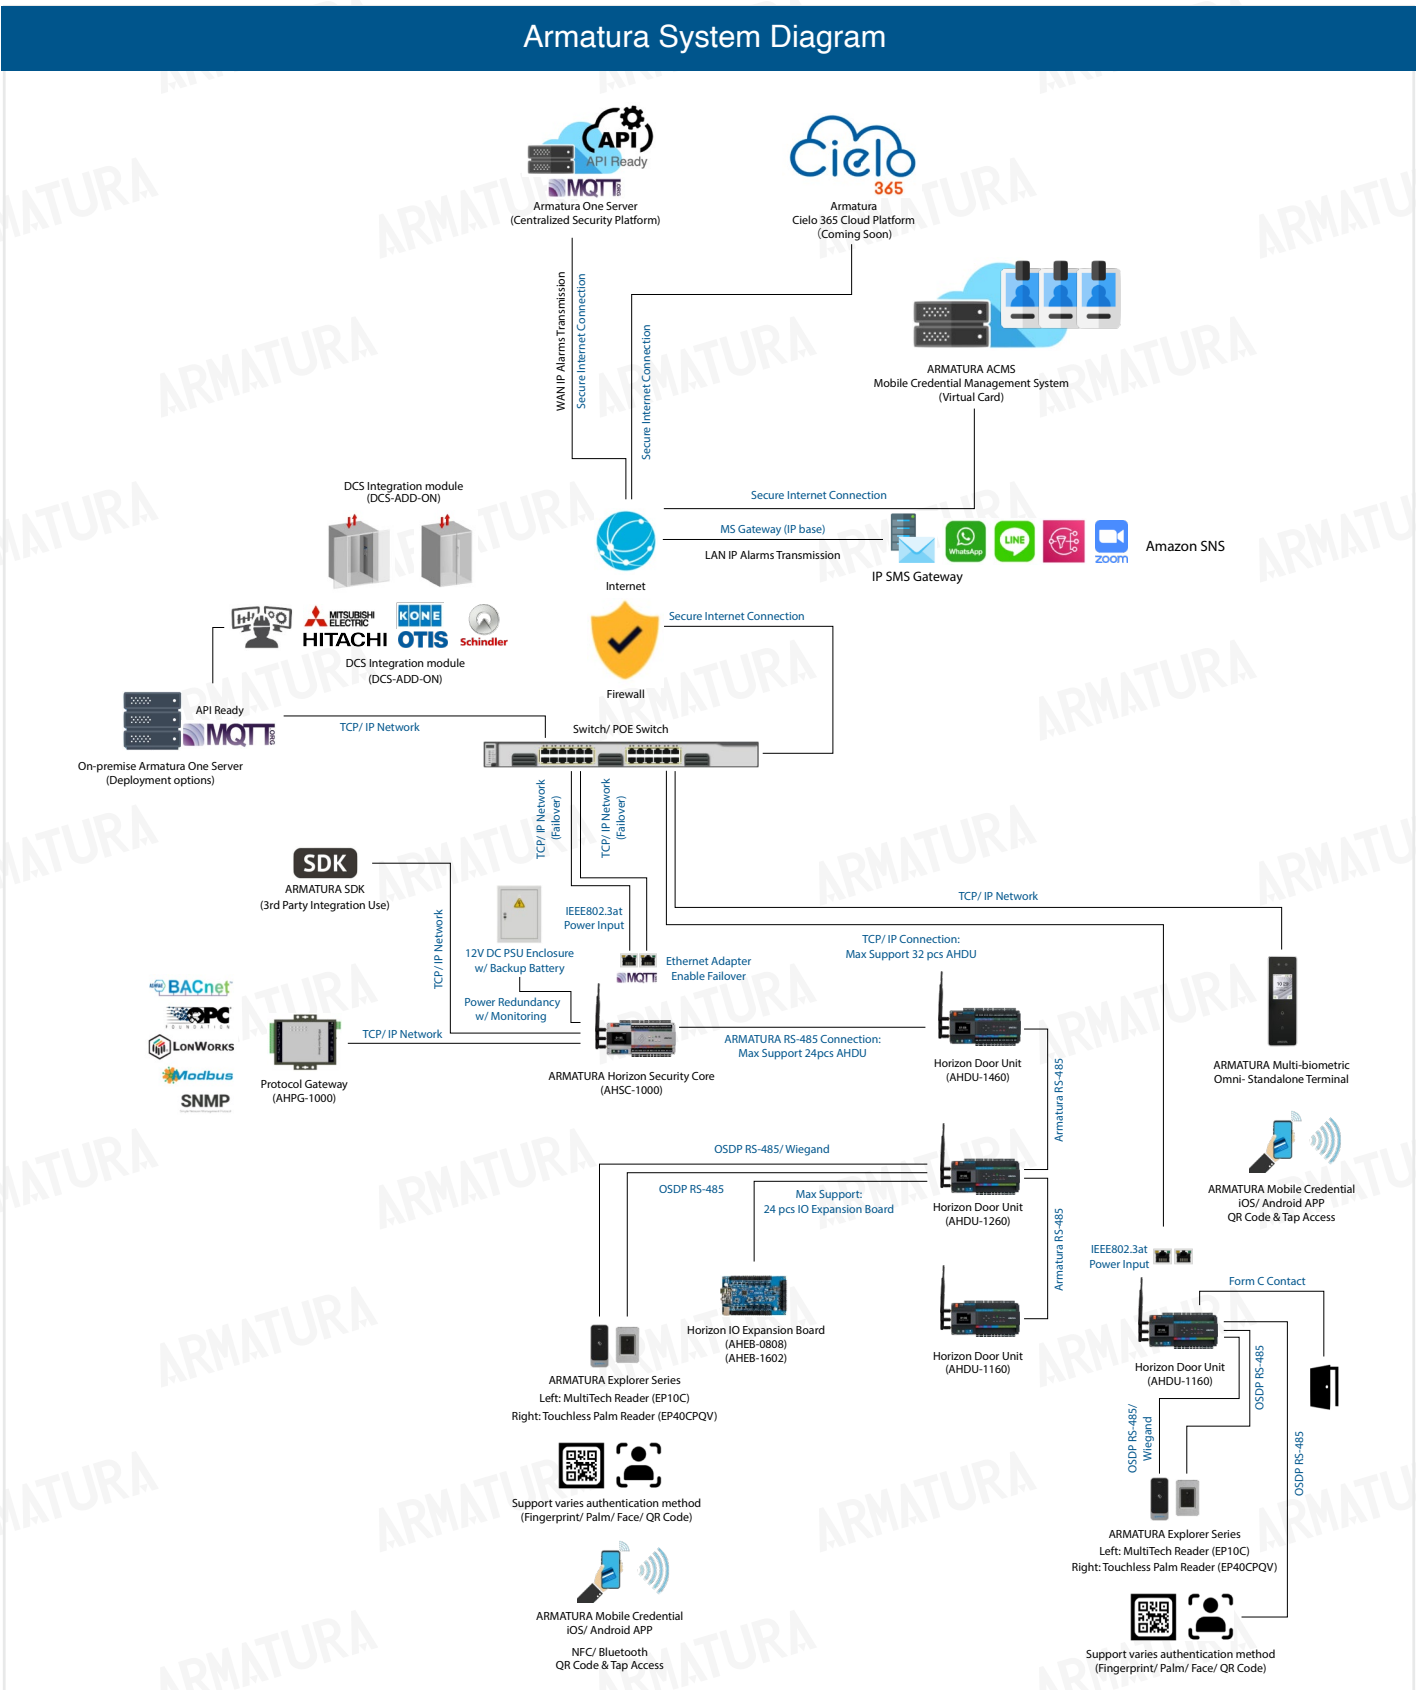

ARMATURA

Address: 190 Bluegrass Valley Parkway, Alpharetta, GA 30005

Phone: + 1 (470) 816-1970

Email: sales@armatura.us

Website: www.armatura.us

Copyright © 2023 Armatura LLC @ ARMATURA, the ARMATURA logo, are trademarks of Armatura

