

FT10CMQ

All Weather Multi-Tech Smart Multimodal Biometric Terminal

- Multimodal biometric technology, touchless palm and face authentication
- IP66 & IK07 Dustproof, waterproof and impact protection rating
- Supports 125 kHz and 13.56 MHz frequency credentials
- Supports reader (Coming soon) and standalone terminal mode
- Supports multiple mount types (Single gang/ European/ Asian box)




Modern Aesthetic Design



The build of the FT10CMQ blends a high-quality metal enclosure with a tempered glass panel. Frontier design, elegant oval arc profile, leading the new trend of intelligent identification terminal, to bring users a new practical and reliable experience.

Dual Installation Mode



The FT10CMQ terminal offers a dual installation mode. It can function as a standalone terminal, directly communicating with the Armatura One server via TCP/IP. It can also serve as a face-authentication reader (coming soon) when paired with AHSC-1000 and AHDU series controllers via OSDP over RS485 communication.

Superior Protection Level



IP66 and IK07 Certified with IP66 Water and dustproof ratings, our readers are designed to withstand dust, dirt, and rain, ensuring reliable performance in challenging environments. Additionally, with a certified IK07 Vandal-proof rating, they offer enhanced protection against tampering and vandalism.

Advanced Security



Secure communication: OSDP(V2.2) over RS-485 communication between the FT10CMQ and access control panels. Using AES-128 encryption standards ensures the highest levels of data protection & security.

Secured Data Storage: The utilization of Certified EAL6+ encryption chips elevates data protection performance to the highest security level, ensuring top-notch financial-grade security.

Supports Multi-Card and Mobile Credential Types



The FT10CMQ offers support for 125 KHz and 13.56 MHz frequency credentials, with compatibility for various card types including EM, IC Card, HID Prox, HID iCLASS, DESFire, and FeliCa, based on the specific RFID module installed. Furthermore, mobile credentials utilizing Bluetooth Low Energy (BLE) are exclusively supported through the RNLB/RNPB/RNIB RFID modules in conjunction with the Armatura ID mobile app, delivering a seamless and versatile authentication experience.

Multi-tech Card & Mobile Credentials



Supports multi-card types in a standard package with various optional RFID modules that cover up to over 10 extra advanced secured RFID protocols, which almost cover most of the end-user requests, enabling high flexibility for multi-card types and mobile credentials situations.

Wide Input Voltage



The device is compatible with 12V-24V input voltages.

Multi-Factor Authentication Capability



Offering credential options of palm, face, Mobile Credentials, physical cards and QR codes.
*EM, MIFARE, DESFire, FeliCa, HID Prox/iCLASS/Seos, etc.
*Integrate advanced multiple biometric authentication methods such as palm and face code scanning for visitors & employees.
*QR code scanning for visitors & employees.

Video Intercom



The FT10CMQ supports standard SIP V2.0 protocol, making it suitable for a wide range of visitor scenarios. With two-way audio streaming and advanced echo and noise cancellation, communication with visitors is a breeze. Additionally, the FT10CMQ supports the Armatura ICS mobile app, enabling seamless cloud-based video intercom services for enhanced convenience and accessibility.

Installation Made Easy



Robust design & form factor makes this device easy to install. PoE option allows for minimal use of cabling and lowers the cost of installation. FT10CMQ supports multiple mount types (Single gang/ European/ Asian box) to meet most scenarios worldwide. Mounting accessories for speed gates are also available.

Unrivaled Palm and Face Authentication Performance



ARMATURA's Multi-Biometric technology combines palm and face authentication with a unique deep-learning algorithm to deliver an efficient and seamless authentication experience. The industry-leading combination of visible and NIR infrared authentication technology ensures exceptional accuracy and robust anti-spoofing protection. Furthermore, the Palm authentication technology complies with the ISO/IEC 19795-2 certification, underscoring its reliability and performance in real-world applications.

Sleep-and-Wake Mode




In sleep mode, the breath light flashes alternately. In wake mode, the ring light is highlighted white. This setting can reduce the unnecessary heat loss caused by the machine in the case of undetected, better protect the machine and long-term performance.

Supports BioCode Function



The FT10CMQ supports the BioCode function, a feature available in the Armatura ID mobile app. BioCode converts biometric templates into a QR code, which is securely stored on the user's mobile device only. This approach ensures that no biometric data is stored on other devices, addressing privacy concerns while maintaining a secure and efficient authentication experience. (Required Individual firmware, please contact Armatura Regional Sales)

Dimensions

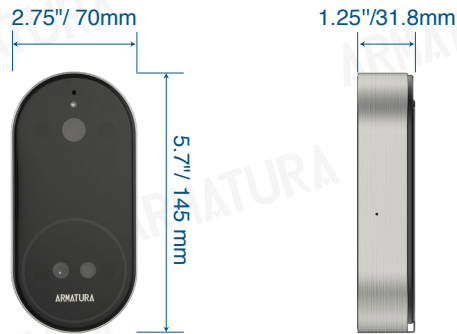

General Information

Primary Power	DC 12V@3A-24V@1.5A ±10%
Operating Frequency/ Standards:	125KHz; 13.56MHz: ISO14443 types A&B, JIS X6319, ISO15693 2.4GHz Bluetooth
POE	Supported (IEEE 802.3 at compliant)
RS-485 connection	RS-485 standard/ OSDP V2.2
CPU	1.2GHz Quad Core ARM Processor
NPU	2.4 TOPs NPU
Memory	2 GB RAM + 16 GB Flash
Camera	CMOS, 2 MP resolution IR: Global shutter CMOS, 1.3 MP resolution IR-CUT: CMOS, 2 MP resolution Resolution: 720*960 pixels
Ethernet network connection	10 Base-T/ 100 Base-TX, Auto MDI/ MDIX
Data Protection	Complies with TLS 1.2 for end-to-end secure communication channel (Secured Communication between the FT10CMQ & Server) (Standalone Mode) AES128 (Secured Communication between the FT10CMQ & OSDP Readers) (Standalone)
Number of Ports	1*TCP/ IP 1*RS-485 4ch TTL Inputs 1ch TTL Output 1 Mechanical Relays & 2 Photorelay
Inputs	Wiegand, Button, Sensor, Aux
Outputs	Wiegand, Lock Relay, Alarm Relay (Relay via dry contacts), Bell Relay(Relay via dry contacts)
Normally Open Contact Rating	2A @30Vdc resistive
Normally Closed Contact Rating	2A @30Vdc resistive
Tamper Switch	Magnetic tamper detection system

Audio Indicator	Internal speaker with adjustable intensity
MIC	Supported
Video Intercom	Support Standard SIP V2.0
User Capacity	50,000
RFID Card Capacity	50,000
Maximum Wiegand Bits	Wiegand In & Out (up to 128 bits)
Face Capacity	50,000 (1:N)/ 100,000 (1:1)
Palm Capacity	5,000 (1:N)/ 20,000 (1:1)
RFID Reading Distance	13.56MHz & 125kHz: Up to 1.96"/ 50 mm (depending on environment and transponder)
Face Authentication Distance	Dual Camera Liveness Detection On: 15.7" - 55.1" (400mm - 1400mm) Single Camera Liveness Detection On: 15.7" - 78.7" (400mm - 2000mm)
Face Authentication Posture Adaptability	Yaw $\leq 30^\circ$, Pitch $\leq 30^\circ$, Roll $\leq 45^\circ$
Face Authentication Accuracy	True Accept Rate (TAR)=99%, False Accept Rate(FAR)=0.01%
Face Authentication Mode	1:1, 1:N
Face Authentication Speed	<300ms (Field Test Result)
Face Authentication Liveness Detection	Yes (Infrared-visible light mode, Infrared Light Mode)
Face Mask Detection	Yes
Palm Authentication Distance	Liveness Detection On: 7" -15.7" (180mm - 400mm)
Palm Authentication Posture Adaptability	Yaw $\leq 45^\circ$, Pitch $\leq 30^\circ$, Roll $\leq 90^\circ$, Bend $\leq 30^\circ$
Palm Authentication Accuracy	True Accept Rate(TAR)=98.7%, False Accept Rate(FAR)=0.01%
Palm Authentication Mode	1:1, 1:N
Palm Authentication Speed	< 140ms (Field Test Result)
Palm Authentication Liveness Detection	Yes (Infrared Light Mode)
QR Code Detection	QR Code Scanner: Supported QR Code Scanning Pattern: Area image (720*1280 pixel array) QR Code Scan Angle: Horizontal: 37.9°/ Vertical: 62.9° QR Code Capability: QR Code (Armatura ID); Static QR (customizable) QR Code Scanning Performance*: Armatura ID QR Code:0.5"-2.05" (12.7mm - 52.07mm); BioCode:0.59"-1.26" (15mm - 32mm)
Recommend Installation Height	55" (1400mm) (Using the plate with tilt angle) 59" (1500mm) (Plate with horizontal angle)
Transaction Buffer	Records: 1,000,000
Access group	99
Access Point Control	1 access point on board
Reader Support	1 (OSDP over RS-485) or 1 (Wiegand Input)
Protection / Resistance	Weather & Dust Proof Protection Rating compliant with IP66 Reinforced Vandal-proof Structure IK07 certified

RFID / Biometrics Reader Interface

Output Voltage	12V-24V (Equal to primary power input)
Maximum Output Current	0.8A
RS-485 Protocol	OSDP V2.2 Secure Channel, AES-128
OSDP Mode	9600-115200 bps, OSDP V2.2, asynchronous, half-duplex, 1 start bit, 8 data bits, and 1 stop bit.
Wiegand	Wiegand In & Out (Up to 128 bits)
Data Inputs	TCP/IP, RS-485, OSDP and Wiegand standards supported.

Cable Requirement

Power	16AWG or 18AWG (DO NOT extend the length of power cable when using the power adapter)
Relays	Twisted pair, 18 to 16 AWG
Ethernet	CAT-5E, Wire diameter (24AWG), maximum 330 ft. (100m) PoE : CAT-6A, Wire diameter (23AWG), maximum 330 ft. (100m)
RS-485 Reader Port	9600-115200 bps, asynchronous, half-duplex, 1 start bit, 8 data bits, and 1 stop bit. One twisted pair with drain wire and shield, 120 ohm resistance, 22-18 AWG, Maximum cable length: 1970 ft. (600m)
Wiegand Port	20 AWG shielded, 164 ft. (60m)

Mechanical

Dimensions	5.71" x 2.76" x 1.25" (145mm*70mm*31.8mm)
Weight	0.991lb (453.59g)
Mounting	Suited for mullion-mount door installations or any flat surface mounting
Housing Material	Aluminum alloy + Tempered glass

Environmental	
Operating Temperature	-4°F -131°F (-20°C to 55°C)
Storage Temperature	-13°F -140°F (-25°C to 60°C)
Operating Humidity	0 - 90%RH (Non-condensing)
Certification(s)	CE, FCC, RoHS, UL294 (Coming Soon)

Software Interface	
TCP/IP Mode	10 Base-T/ 100 Base-TX, Auto MDI/ MDIX
TCP/IP Protocol	VLAN, SSH, HTTP, IPv4, DNS, ONVIF, RTSP
TCP/IP Encryption	Complied up to TLS1.2 end to end secure communication channel
TCP/IP Communication	Gladius Protocol over HTTP, HTTPS
Supported Software	Security Platform: Armatura One Mobile Credentials: Armatura ID (Mobile App) (RNIB / RNPB version) Video Intercom: Armatura ICS (Mobile App)

Frequency	Classification	Card Module Abbreviation	[DF]	[RNLB]	[RNPB]	[RNIB]
		Compatible Readers	FT10CMQ	FT10CMQ	OmniAC20, OmniAC30, FT10CMQ EP20CQ, EP20CKQ, EP30CF	OmniAC20, OmniAC30, FT10CMQ EP20CQ, EP20CKQ, EP30CF
13.56MHz	ISO14443A	LEGIC Advant				
		MIFARE Classic, Mini S50,S70	√4)	√4)	√4)	√4)
		MIFARE Classic EV1	√4)	√4)	√4)	√4)
		MIFARE DESFire Light			√4)	√4)
		MIFARE DESFire EV1	√4)	√4)	√4)	√4)
		MIFARE DESFire EV2/ EV3	√4)	√4)	√4)	√4)
		MIFARE Plus S, X			√4)	√4)
		MIFARE Pro X			√4)	√4)
		MIFARE Smart MX			√4)	√4)
		MIFARE Ultralight			√4)	√4)
		MIFARE Ultralight C			√4)	√4)
		MIFARE Ultralight EV1			√4)	√4)
		NFC (NTAG2xx)	√	√		
		PayPass				
	ISO14443B	SLE44R35				
		SLE66Rxx (my-d move)				
		Topaz				
		HID iCLASS SEOS				√20)
		NFC (HCE Mode, works with Armatura ID)			√	√
		Calypso				
		Calypso Innovatron protocol				
		CEPAS				
		HID iCLASS				
		CTS				
	ISO18092/ ECMA-340	Moneo				
		Pico Pass				
		SRI4K, SRIX4K				
	ISO15693	SRI512, SRT512				
		Sony FeliCa			√1)	√1)
		EM4x33				
		EM4x35				
		HID iCLASS			√1)	√10)
		HID iCLASS SE/ SR/ Elite			√1)	√10)
		iCODE SLI				
		LEGIC Advant				
		M24LR16/64				
		MB89R118/119				
		SRF55Vxx (my-d vicinity)				
		Tag-it				
		Pico Pass				
		LEGIC Prime				
		CPU Card				

ARMATURA

ARMATURA RFID Card Module Supporting List

ArmaSec-03142025

Frequency	Classification	Card Module Abbreviation	[DF]	[RNLB]	[RNPB]	[RNIB]
		Compatible Readers	FT10CMQ	FT10CMQ	OmniAC20, OmniAC30, FT10CMQ EP20CQ, EP20CKQ, EP30CF	OmniAC20, OmniAC30, FT10CMQ EP20CQ, EP20CKQ, EP30CF
125kHz		AWID				
		Cardax				
		CASI-RUSCO			√	√
		Cotag				
		Deister				
		EM4100, 4102, 4200	√	√	√	√
		EM4050, 4150, 4450, 4550				
		EM4305				
		FDX-B, EM4105				
		Ultra Prox				
		G-Prox				
		HID DuoProx II (1336)			√1)	√1)
		HID ISO Prox II (1386)			√1)	√1)
		HID Micro Prox II (1391)			√1)	√1)
		HID Prox III (1346)			√1)	√1)
		HID Prox			√1)	√1)
		HID Prox II (1326)			√1)	√1)
		HITAG 1, 2, S				
		ICT				
		IDTECK				
		Indaia				
		ioProx				
		ISONAS				
		Keri				
		Miro				
		Nedap				
		Nexwatch				
		PAC				
		Pyramid				
		Q5				
		T5557, T5567, T5577				
		TITAN (EM4050)				
		UNIQUE				
		ZODIAC				
2.4GHz		BLE		√	√	√
		Globally Available			Y	Y
	Availability	Globally Available (Except for U.S., E.U., Japan, Australia, Canada, U.K., Albania, Iceland, Liechtenstein, Monaco, North Macedonia, Norway, San Marino, Serbia, Switzerland, Turkey, and the United Kingdom)				

- 1) UID only
- 2) Read /write enhanced security features on request
- 3) Read /write in direct chip command mode
- 4) UID only, read/write on request
- 5) UID + read /write public area

- 6) Hash value only
- 7) Only emulation of 4100, 4102
- 8) On request
- 9) Without encryption
- 10) UID+PAC (CSN & Facility Code), read /write on request
- 11) In preparation

- 13) EV2/EV3 supported as part of the EV1 upward compatibility
- 14) From FW V4.05
- 20) PAC (CSN & Facility Code), read /write on request

The final interpretation of this data sheet belongs to Armatura LLC.

All information regarding the card formats supported by the RFID card modules are claimed by the provider(s) of the card modules. Armatura LLC accepts no liability.

***To be released**



Address: 190 Bluegrass Valley Parkway, Alpharetta, GA 30005
Phone: + 1 (470) 816-1970
Email: sales@armatura.us
Website: www.armatura.us
Copyright © 2025 Armatura LLC @ ARMATURA, the ARMATURA logo, are trademarks of Armatura